

# StarProg-F

## FLASH Engineering Programmer



### StarProg-F

is a FLASH engineering IC programmer supports a variety of Flash IC on the market, like EEPROM, SPI NOR/NAND Flash, Parallel NOR/NAND Flash, eMMC/eMCP, etc. Powered by USB port and does not need external power. StarProg-F provides users Command Line for software redevelopment. Palm size and space saving. Whether engineering development or low volume production, Starprog-F offers user the best solution.

#### Features

##### ● High programming speed

Built in high speed processor to achieve high programming speed  
Timing reference (P+V)

MX25L1655D 8.5s

S29GL064S 16.4s

S34ML01G200T 44s

##### ● Support all Flash IC and packages

1. Support EEPROM, SPI NOR/NAND Flash, Parallel NOR/ NAND Flash, eMMC, eMCP, etc .
2. Support DIP, SOP, SSOP, TSOP, PLCC, QFN, BGA package, etc.
3. Regular device update

##### ● Support a variety of file formats

Binary, Intel Hex, Motorola, ROM, etc

##### ● Support 1.8V low voltage IC

##### ● Provide Command Line


User can use 3rd party software to control the programmer through Windows command line

##### ● Powered by USB port, need no external power


##### ● Unlimited number of StarProg-F can be driven by 1PC



Multiple StarProg-F

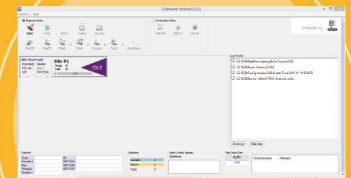

Window GUI



Command Line

Taiwan Headquarter TEL : + 886 - 2 - 2790 - 7932 FAX : + 886 - 2 - 2790 - 7916

4F,No.7,Lane 143, Xinming Rd., Neihu District, Taipei, Taiwan, R.O.C 114

China Office TEL : + 86 - 21 - 5160 - 0157

Room 518, Building 66, Lane1333, Xinlong Road, Vanke Hongqiao CBD.Min Hang District, Shanghai, P.R.C. 201101

U.S. Office TEL: + 1 - 909 - 274 - 8860

209 E Baseline RD, Suite E208 #8, Tempe, AZ, 85283, USA



DediProg  
Technology

# StarProg-F

## FLASH Engineering Programmer

Specification

### Hardware

Architecture	ARM and FPGA architecture with high density SDRAM
Programming Interface	Socket adaptor
IC Adaptor	DIP, SOP, SSOP, TSOP, PLCC, QFN, BGA, etc
Communication Interface	High speed USB 2.0
External Memory Card	8 GB micro-SD card
Operation Interface	Busy/Pass/Error LED, Start key
Hardware Protection	Overcurrent and ESD protections
Vcc	1.6~5V
Current limitation on Vcc	~300mA
Vpp	1.6~12V
Current limitation on Vpp	~100mA

### Supported IC

EEPROM, SPI NOR/NAND Flash, Parallel NOR/NAND Flash, eMMC, eMCP, etc

### Software

Operation Software	Dediware
OS Supporting	Windows XP/ Vista / 7 / 8 / 8.1 / 10
File Typed Supported	Binary, Intel Hex, Motorola, ROM, etc.
Programming Function	Contact Testing, Blank Check, Erase, Program, Verify, Option/Protection
Extra Function	Multiple StarProg-F, serial number and Unique key (ex. HDCP) programming

### Power

USB 5V or DC 5V/2A

### Dimension

135mm\*75mm\*17mm

### Weight

101g

### Standard Accessories

1. StarProg-F main unit\*1
2. USB cable\*1
3. CD-ROM (Include Dediware software and user manual)\*1
4. Power Adaptor\*1
5. 8 GB SD card\*1



Taiwan Headquarter TEL : + 886 - 2 - 2790 - 7932 FAX : + 886 - 2 - 2790 - 7916  
4F, No. 7, Lane 143, Xinming Rd., Neihu District, Taipei, Taiwan, R.O.C 114

China Office TEL : + 86 - 21 - 5160 - 0157  
Room 518, Building 66, Lane 1333, Xinlong Road, Vanke Hongqiao CBD, Min Hang District, Shanghai, P.R.C. 201101

U.S. Office TEL: + 1 - 909 - 274 - 8860  
209 E Baseline RD, Suite E208 #8, Tempe, AZ, 85283, USA



**DediProg**  
Technology

Email: sales@dediprogram.com  
Website: www.dediprogram.com